


USER'S MANUAL

Android car dvd player

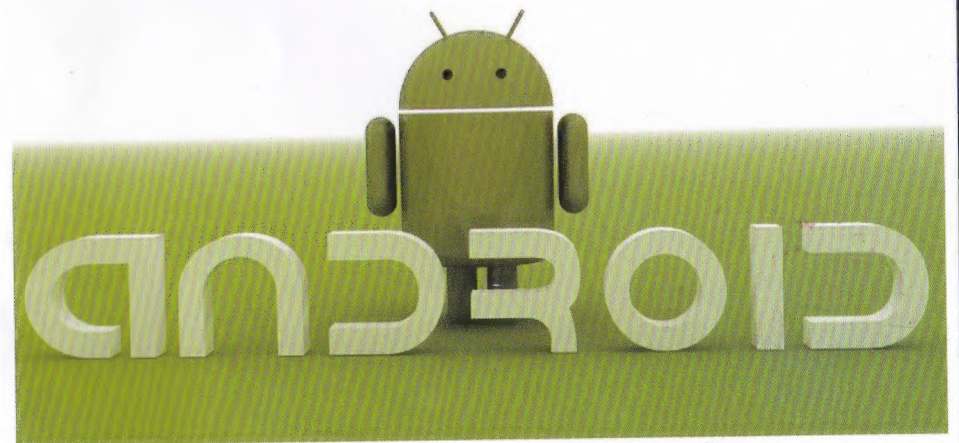

We are very glad that you have chosen this car audio navigation. This device is the Android platform product that supports 3G WCDMA networks and Wifi, You instantly have a fast and convenient Internet experience; and it features with simple figure, cool interface and rich multimedia entertainment functions, let you have a completely different user experience. This article describes the multiple functions of the equipment, technical and precautions comprehensively. Please read this manual carefully in order to guide you to use the unit easily.

The use of certain features of these devices depends on your network service provider's network settings and performance. In addition, due to the different network service providers, some certain functions of this device may not be able to apply or restrict to apply. And please contact your network service provider for consulting the network functions and availability of this device. Rungrace will retain the right to edit and correct this user manual, without notice and does not bear any responsibility.



This product meets the national standards issued by "People's Republic of China Electronic Information Products Pollution Control Regulations"



This mark indicates that the product used a label which is classified CLASS1 laser, indicating that the device uses the weakest level of laser beam, and there is no risk of radiation outside the unit.

Contents

Introduction	1
Contents	2
1. Quick Review	3
1.1 Turning On and Turning Off	3
1.2 Panel Function Button	3
1.3 Tips for Using Touch Screen	4
1.3.1 Clicking Function	4
1.3.2 Pressing Function	4
1.3.3 Dragging Function	4
1.3.4 Zooming Function	4
1.4 Main Screen	5
1.5 Status Bar and Indicator	5
1.6 Time and Date Setting	5
1.7 Text Entering	5
2. Function Operations	6
2.1 Basic Settings	6
2.1.1 User Defined Home Screen	6
2.1.2 Setting Wallpaper	6
2.1.3 Shortcut	7
2.1.4 Widget	7
2.2 General	7
2.2.1 Steering Wheel	7
2.2.2 Screen Calibration	8
2.2.3 Navigation application	8
2.2.4 Factory Settings	8
2.3 Navigation	8
2.3.1 Navigation Software Installation	8
2.4 Radio	10
2.4.1 RADIO	10
2.4.2 RDS	11
2.5 Bluetooth Wireless Connection	11
2.5.1 Startup bluetooth application	11
2.5.2 Bluetooth Pairing	12
2.5.3 Bluetooth Phone Book	12
2.5.4 Phone	13
2.5.5 Call Record	14
2.5.6 Bluetooth Music	14
2.5.7 The whole Bluetooth hardware settings	15
2.6 3G Application	15
2.6.1 Allow data roaming	15
2.6.2 Set up access point information	16
2.7 WLAN	18
2.8 Multimedia	19
2.8.1 Equalizer	19

2.8.2 DVD Player	20
2.8.3 CD Player	21
2.8.4 iPod Player	21
2.8.5 Audio Player	22
2.8.6 Video Player	23
2.8.7 Image View	24
2.8.8 Digital TV	25
2.8.9 Analog TV	25
2.9 AUX In Function	25
2.10 Rear View	26
2.11 Email	26
2.11.1 Setting Up Email	26
2.11.2 Sending Email	27
2.11.3 Receiving Email	28
2.12 Message	28
2.12.1 Writing New Message	29
2.12.2 Replying Message	29
2.13 Applications	29
2.13.1 Weather	30
2.13.2 Calculator	30
2.13.3 E-Reader	30
3. Firmware Upgrading	30
3.1 Preparing for upgrade	31
3.2 Upgrading Mcu	31
3.3 Update system	32
4. Trouble Handle	32

1. Quick Review


Warning: Before using this device, please read the manual safety and law information.

1.1 Turning On and Turning Off

Turning On	When you plug in the car keys, open the car's ACC power, the device will be automatically turned on, displaying the boot animation LOGO.
Turning Off	When you take off the key, turn off the car's ACC power, the device will automatically be shut down.

1.2 Panel Function Button

Icon	Name	Function
PWR/VOL	Power/Volume	① In the off state, press this button short, the system is turned on. ② In the boot state, press this button short, the system becomes mute; press this button, the system is shutdown ③ Turn this button clockwise, the volume is increased ④ Turn this button counterclockwise, the volume is decreased.
HOME	Main Interface	Click to enter into main interface.
MENU	Main Menu	① In each function, extended manipulation of

		information, press the MENU key to pop up; ②In the main interface, press the MENU key for the system to quickly set function
BACK	Back	Click to back to the last interface.
NAVI	Navigation	Click to enter into GPS navigation interface.
DVD	DVD Play	Click to enter into disk play interface.
PHONE	PHONE	Click to enter into Bluetooth telephone interface.
RADIO/BAND	RADIO/BAND	Click to enter into radio interface for receiving FM1/FM2/ AM radio
TUNE	Compound	①In the audio and video playback interface, up / down one player ②In the radio interface up / move down frequency
	In/Out Disc Button	disk in and out
SD	SD Media Card slot	Insert the appropriate memory card, multimedia file system can read the card
USB	USB Socket	①Connect other devices by USB socket. ②Connecting an external WIFI/3G dongle
RESET	Reset Button	Click reset button to reset system and re-start.
MIC	Microphone	.Receive voice from bluetooth telephone call.

Remark: All long press means press time at least lasting 3 seconds; Button and socket is different according to different car types, please take real type as standard.

1.3 Tips for Using Touch Screen

When using the touch screen, you can use several ways to perform corresponding operations on the device.

1.3.1 Clicking Function

You could select an application icon or option on the screen to realize clicking function. For example, click Bluetooth to enter into bluetooth application.

1.3.2 Pressing Function

You could press the current user interface, icon inputting column by pressing function. For example, press on the blank area of the main interface, then comes a pop-up menu, you could perform some function on the menu.

1.3.3 Draging Function


Drag the touch screen or press the scroll bar for up and down operation. For example, browse the contact list of the bluetooth phones by dragging function.

1.3.4 Zooming Function

When browse the web, click the screen twice, then you could zoom in or out the page content. Or you could press the screen with two fingers by control the sliding distance between the fingers to zoom in or out the page content.

1.4 Main Screen

You can use the touch screen operation to use the various functions of the device. This equipment has a total of five main screen, left or right sliding can be switched with each other. Any interface press the HOME physical buttons on the panel to return to the main screen interface, and display the application icon in the main screen interface, click any application icon to open the program.

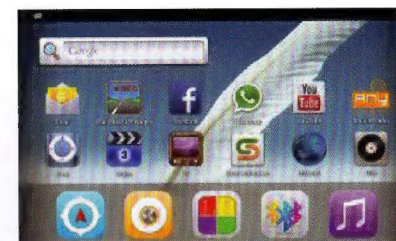







Note: You can add the freedom of the space of the main screen or Remove Programs icon to see equipment Basic Settings section.

Click the application icon, you can view all of the programs of the equipment.

1.5 Status Bar and Indicator

Icons on the left top of the screen are notifications for messages and events; Icons on the right top of the screen are device status indicator.

If there is new message, it will be displayed on the status bar, slide your finger gently from the status bar, all prompts would be displayed. Then you could click the message and view the content.

Indicators on the left	Description	Indicators on the right	Description
	Network signal strength		Network signal
	New Message		USB connection instructions
	WIFI signal indicator		Current Time indication

Tip: You can tap and hold the status indication bar to view the current day.

Note: The device software is under upgrading, the status indicator may be different with your device, please refer to the actual device software.

1.6 Time and Date Setting

This device has the function to automatically calibrate the current time on the condition that the GPS is active. You could also manually set the date, time zone and format.

Applications> Settings

> Date and Time

> Setting Date or Setting Time

Tip: You can set the time zone and time format according to request.



1.7 Text Entering

When edit text, you could use existing method of entering and Android keyboard to edit English, numbers, and symbols etc. Such as editing message, searching key words etc.


Tip: The display format would be different according to different status and keyboard of the entering, please refer the actual one.

1.7.1 Switch on the Entering Method

Open the text editing interface

Click in the editing area, then the editing menu would be appear.

according to the input method, input method you want to use the midpoint of the input method menu, you can choose the Android keyboard or install third-party input method.

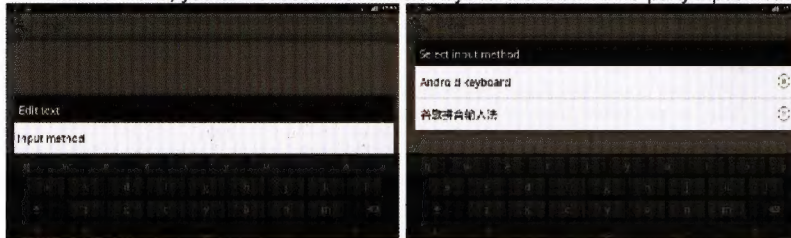



1.7.2 Android Keyboard Input

a. Android

Switch the input method into Android keyboard (see switch input method)

b. Enter the text

Remark:

- ① You can click the number sign key  to switch to numbers and symbols input mode.
- ② click  to switch letter case.


2. Function Operations

2.1 Basic Settings

2.1.1 User Defined Home Screen

There are 5 main screens of this device, sliding left or right to switch. In any interface, you just need to click the HOME to back to main screen.

Note: You could add shortcut, widget nad file in the blank area of the main screen on the condition that there is enough room for placing.

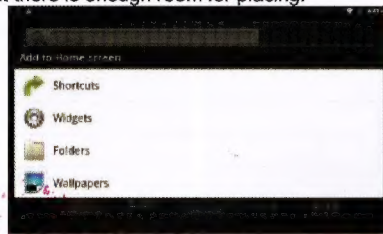

2.1.2 Setting Wallpaper

Click the blank area of main screen> Wallpaper

Wallpaper or Pictures Bank


Choose your preferred wallpaper and click to set as wallpaper.

2.1.3 Shortcut

Click the blank area of main screen> shortcut

Choose Shortcut

Click the shortcut needed.

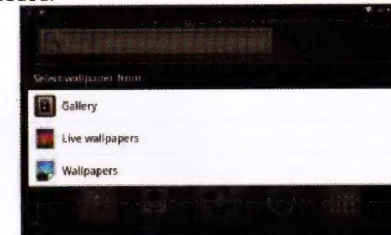


2.1.4 Widget

Click the blank area of main screen> Widget

Choose widget

Click the widget needed.

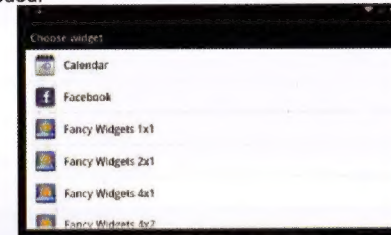

2.2 General

2.2.1 Steering Wheel


Users could set the steering wheel according to hint.

Note: Steering wheel interface is special for cars with buttons, but some cars' steering button are not able for study but by "can", such as Ford MONDEO

Application>Setting

General Settings

Steering wheel Settings

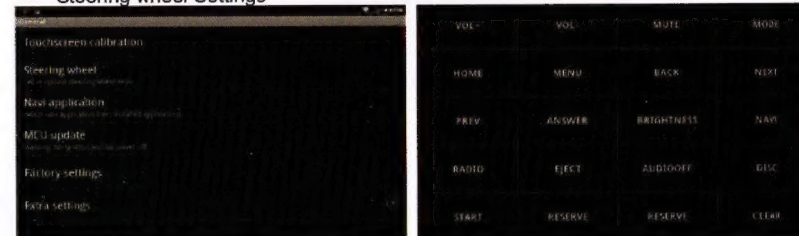

Steering Wheel Interface

a. 【Start】 First to click "Start"

b. Click the buttons as you want.

c Click the corresponding button on the wheel, if the study displays successful, there will be a change on the corresponding color on the main screen.

- d. Repeat step 1 and 2 till you complete all the buttons' setting on the steering wheel.
 - e. Click "END" to ensure that the steering wheel setting is completed.
- If you want the steering wheel button to re-learn, press the [CLEAR] Repeat a, b, c, three steps

2.2.2 Screen Calibration

Applications> Settings>General Settings>Touchscreen calibration


Enter the calibration screen to calibrate the screen interface, please click as close as possible to the cross until a successful calibration, then exit the calibration screen.



2.2.3 Navigation application

Select appropriate map application, then it can be associated with the navigation button on the physical and navigation icon on the main screen.

Applications> Settings
 > General Settings
 > Navigation options
 > For example:IGO

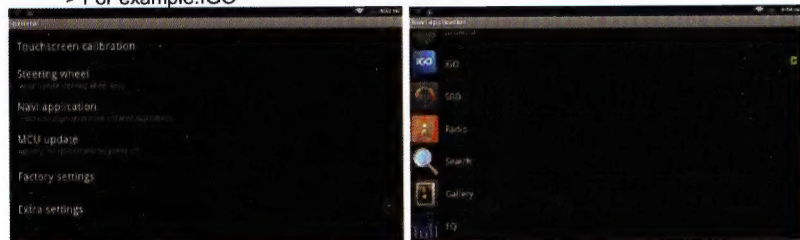

2.2.4 factory settings

When the system is unable to used or there is problems after user used the system, it can be restored to the factory settings. Once it's restored to factory settings, all the third-party softwares would be deleted, and the current system settings would be lost. For navigation software, just need to install corresponding APK. Please operate carefully.


Applications> Settings>General Settings>factory settings

2.3 Navigation

2.3.1 Navigation Software Installation

Copy the application programm with suffix name "APK"to SD card or U disk. There are two installation methods:

Click into the document management interface to find SD card or U disk directory and select "APK" application, and click install directly.

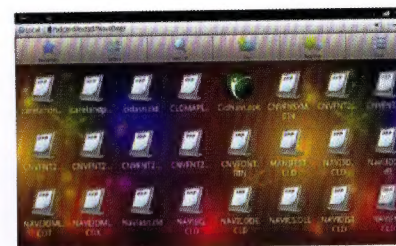

File Management Interface

Applications> File Management Interface

Expansion card or U disk

Extra Interface->Application Programm->Install Application Program
 Select the application programm with suffix named "APK" and install.



Application Programm Interface

Application > Settings

Applications


Application Programm Installation

Note: this method to install the navigation software before installation, the navigation map software copied to the system comes with storage, and then install the navigation APK. Specific methods are as follows:


1 insert navigation data packets to the SD card or a U disc

2 start the ES file browser (or other document management software)

3 into the " /sdcard/extsd" (SD) or " /sdcard/udisk" (U) directory, find the navigation packet directory (for example: NaviOne (Kelid navigation)), according to the catalog in the pop-up menu, select Copy command

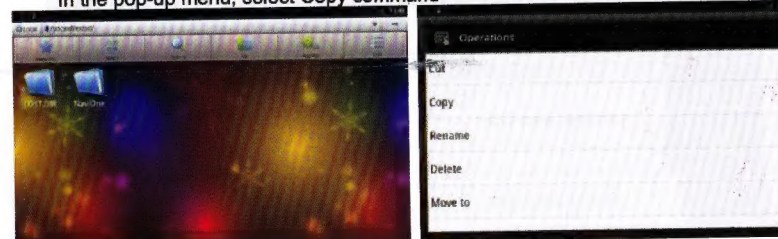

1 Go back to the "/sdcard/" directory, choose the paste command

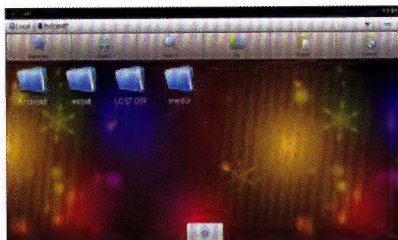


2 waiting for the copy is complete (30 minutes approximately /3.5G)

3 After successful installation required to choose you need to use the navigation application program, association panel on navigation physical keys NAVI and interface of the main navigation application icon (see 2.2.4navigation options).

2.4 Radio

2.4.1 RADIO

Press the RADIO button on panel or click the icon on the main menu to enter the radio interface, the specific functions and operations are as follows:

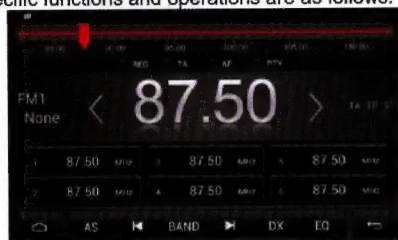

Radio Interface

The functions of Icons in the radio interface are described below:

Icon	Button Name	Function Description
	Band Switching	Click BAND to switch between mode FM1/FM2 /AM.
	Search Channel Backwards	Click to search channel backwards then stop when find clear channel
	Search Channel Forwards	Click to search channel forwards then stop when find strong and clear channel.
	Scan all Channels	Scan automatically and save channels(Coupled with a scanning radio signals broadcast for 10 seconds, no signal of the radio scan play 3 seconds)
	Locate and DX	Change between locate and DX models.
	Audio settings	Click enter the EQ setup
	list of radio stations	List of radio stations, according to the storage for the playing frequency point

	Forward tuning	Forward tuning radio
	Back tuning	Backward tuning radio
	Main Menu	Click to back to main menu.
	Back	Click to go back to last interface.
	Automatically search	Search and save band automatically.

2.4.2 RDS

Radio interface with RDS

Icon details as below:

	Traffic Announcem ent	Click TA symbol to light up, it can source automotive the station which can broadcast traffic information, the system will source once every minute, it will stop to display traffic matter when we get the news; and it will directly go back to the situation after traffic information displays.
	Alternative Frequencies	Click AF symbol to light up, RDS can swift to the station which has stronger signal when the frequency is weak, but the content of RDS station will not change, just move to the other frequency. Meanwhile it only can source RDS station.
	Program Type	symbol to light up, RDS radio display type When the received RDS station, the corresponding PTY information is automatically displayed.
	Regional Link	Click REG symbol towill charge the current RDS station to listen to the national area code (PI 8-bit representation of the high country area code) the same RDS radio, if REG is not highlighted, you can search ignore the area code (without regard to the high 8-bit PI code) of the RDS station

2.5 Bluetooth Wireless Connection

You could create a wireless connection between a mobile phone and this device for data exchange.

Note: ① There may be prohibition or restriction for Buletooth devices, please abide by local laws.

②In order to ensure buletooth security by the greatest degree, you should in safe and non-public place when connecting a bluetooth device.

2.5.1 startup bluetooth application


Under the default status, the bluetooth would be turned on when the power is connected. Panel "PHONE" key to quickly enter the Bluetooth interface;




2.5.2 Bluetooth pairing

The whole information of the Bluetooth interface, the mobile search auto-complete matching (the default passkey: 0000)

Matching refers to two Bluetooth devices, the first communication, the mutual recognition process. Between two Bluetooth devices via the distributionRight after the subsequent communication connection will not have to always do validation (and mobile phone, phone). Bluetooth pairing interface into the status of the Bluetooth search mode, this machine is searching for Bluetooth devices around, again, will automatically terminate the search state.

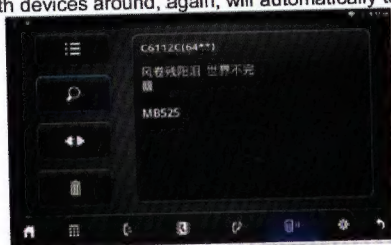

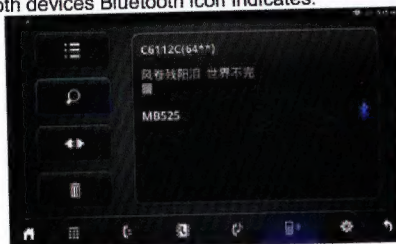

You want to connect to the Bluetooth device name to match connection automatically after the connection is successful jump to the matching list, in the name of the successful connection of Bluetooth devices Bluetooth icon indicates.







Note: The following operations are performed in the Bluetooth pairing success and connect under the conditions of operation:

2.5.3 Bluetooth Phone Book

In the Bluetooth interface, click  to enter the Bluetooth Address book interface. And follow the  download the phone book




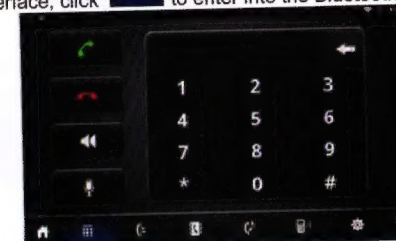
A list of dial-up operation when long names and numbers are used to scroll the display Bluetooth Phone Book Interface

	Download the phone book
	Download Mobile phone SIM card phone book
	All download mobile phone book
	Delete all phone book imported.


2.5.4 Phone


2.5.4. To achieve the dialing function via Bluetooth



In the Bluetooth interface, click  to enter into the Bluetooth Dial interface.



Bluetooth phone Dial Records Interface

Click numbers on the interface, if the input is wrong, click  to delete

Click  after entering phone number; Click  to end up the call.


Are on a call, press the  switch to the phone call, press  Mute for MIC.

Function keys on the panel are unavailable when in the call; the function keys return to normal after hang up.

2.5.4.2 To achieve the called function via Bluetooth



When the mobile phone is connected with Bluetooth device, there is an incoming call, the interface is divided into two situations:

① In the Bluetooth Application Interface

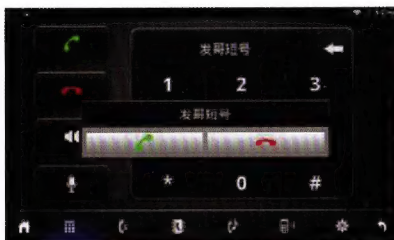


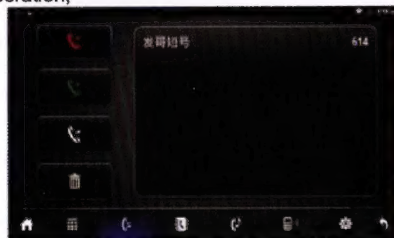
② In other interfaces



Note: Click  the call is pickup the phone, and click  means to hang up, the small window will automatically disappear.





2.5.5 Call Record

In the Bluetooth interface, click  to enter into bluetooth call history interface. Click for doing dial operation,




Call recording interface


Remark: When the names and numbers are long, they would be displayed rollingly.

	Missed calls
	Received calls
	Dialed calls
	Delete all call information

2.5.6 Bluetooth Music

In the Bluetooth interface, click  into Bluetooth Music Interface.

When connected with bluetooth mobile phone, it can operate play/pause/down music function.

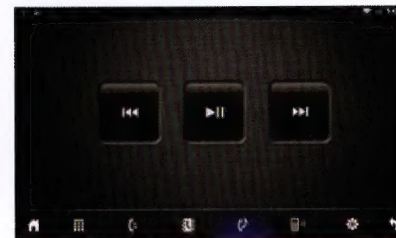





Bluetooth Music Interface

Note: Some kind of mobile phones need to start playing music player for bluetooth music when using bluetooth music function.

2.5.7 The whole Bluetooth hardware settings

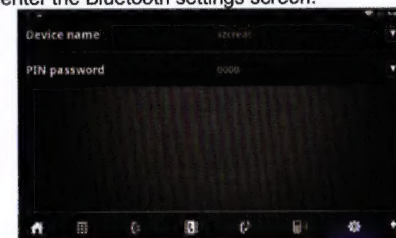Bluetooth interface, enter the Bluetooth settings screen.



Device name	The whole phone name set
PIN password	Pair settings
	Click to back to main menu.
	Click to go back to last interface.
	Back to matching the main interface

2.6 3G Application


Applications> Settings
Wireless and Network
Mobile network
Access Points

2.6.1 Allow data roaming

Applications> Settings
Wireless and Network
Mobile network

① Click data roaming, select OK.

② If the recognition is successful, the access would automatically identify the type of 3G device to populate the appropriate access automatically, as shown below:

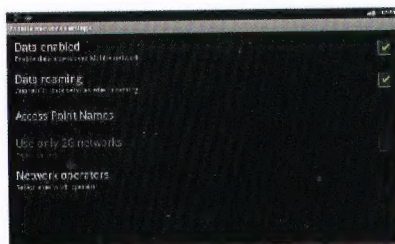


Note: please confirm data roaming open, otherwise you cannot use the 3G function

2.6.2 Set the access point information

Use 3G, please 3G module connected to the USB interface, and available to confirm insert a 3G card.


a. into the system main interface.

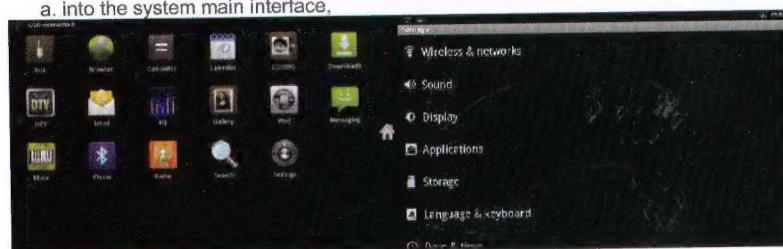

b. Select the "Settings" to enter the main interface.

c. "Wireless & networks",


Select "Wireless networks", access to the network selection screen.

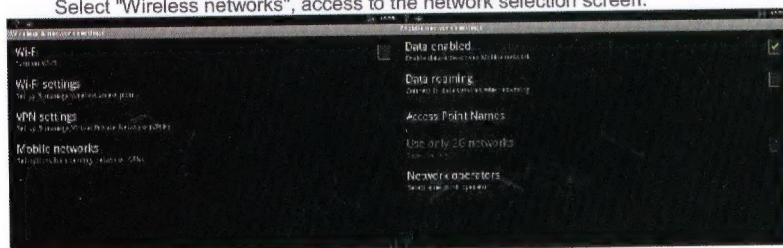

d. "Mobile networks",


Select Mobile networks", enter the mobile network settings of the main interface,

e. "First make sure the data roaming "Data roaming" is selected, if you have no choice, point the "Data roaming" "pop-up prompt menu, select "Ok",

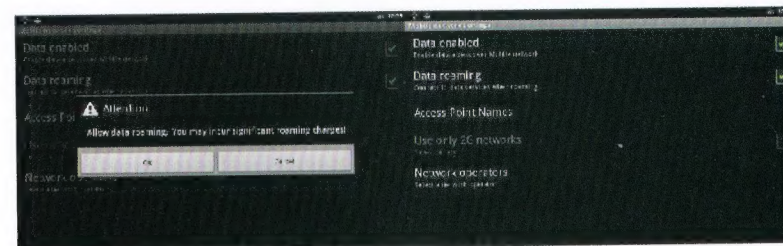


f. Results shown in Figure 7. Choose the successful:

g. Set the Access Point Names", enter the name of the network access point settings to the main interface.

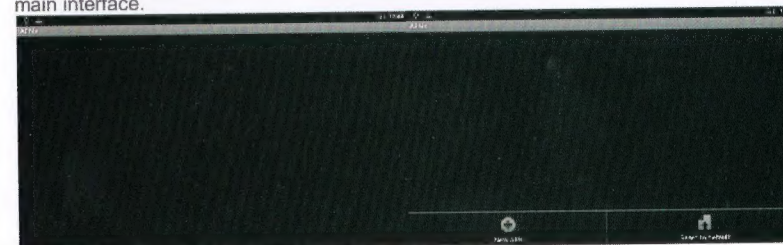


h. Press the "Menu" button on the machine panel, pop-up menu option.


i. Select "New APN" new "APN" into the "APN" to set the main interface.

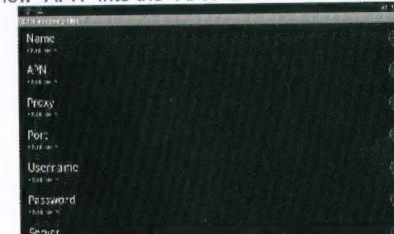

j. Select the "Name" set Apn name, "Name" can easily set, input is complete, select "OK" to the end of the name set

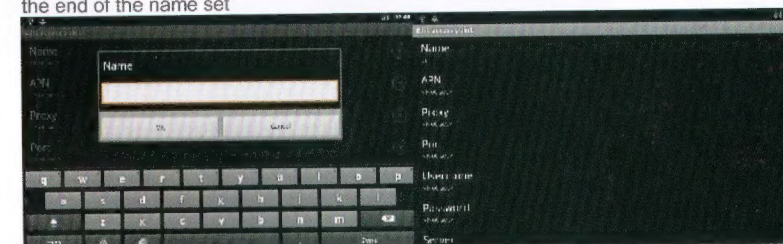


k. Select "APN", enter "the Apn access name in the Chinese mainland of China Unicom's 3G the APN settings for:" 3gnet "in Hong Kong, Macao and Taiwan and foreign, should be consulted local 3G network supplier, enter the corresponding APN value.

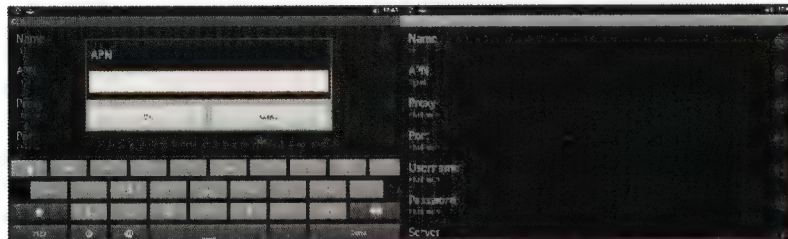

l. Press the "Menu" button on the machine panel, pop-up menu option.



m. select "Save" to save the settings content, and return to the main interface of Apn settings n. The following interface pops up, make sure that Step 1 is complete, press Home to return to the main interface, then repeat 1-15 steps

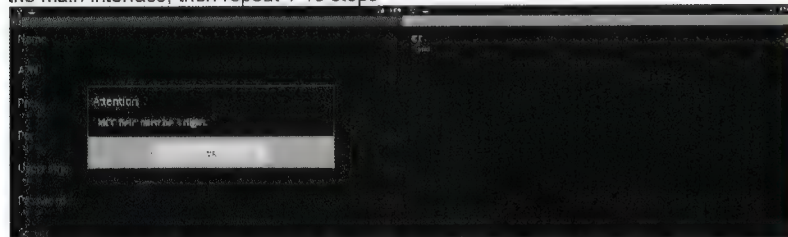

o. In the Apn the main interface, select New APN network behind the circle, so that it is selected can.


p. Back to the main interface, the 3G network has opened, the search to the 3G signal, can use 3G network.

2.7 WLAN

You can use the WLAN high-speed Internet access and download.


Applications > Settings
Wireless & networks setting

1. Open Wi-Fi device
2. Wi-Fi settings search, Wi-Fi is open, the device will automatically scan the network, listing all of the network within the search range

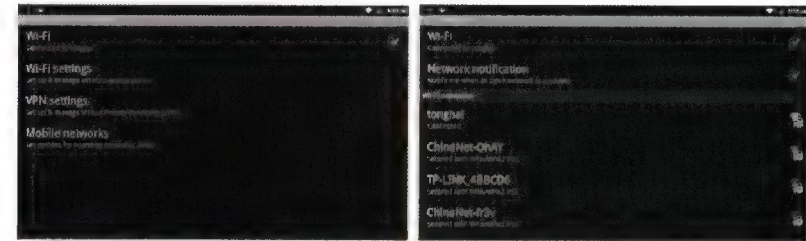

point according to the connectivity of the network, click on the link

3. if required, enter wireless password, click on the link, as shown below:

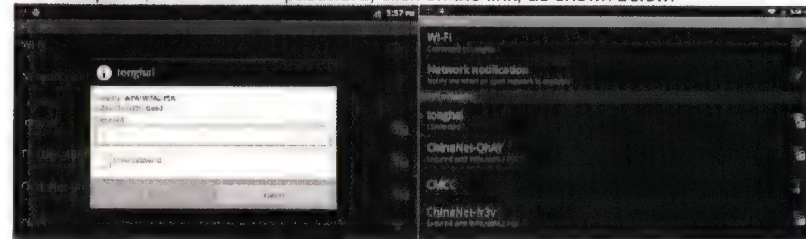

Successful connection interface

The first input password to connect successfully, then don't do this, reboot the system will automatically connected to a matching wireless network.

2.8 Multimedia

2.8.1 Equalizer

Applications > Equalizer

Click equalizer application icon into the equalizer interface. Or click **EQ** to enter into EQ Setup operation in all audio or video playing interface. Equalizer settings interface is divided into two functions: namely, equalizer and sound field settings function.

① In the equalizer settings interface provides 8 kinds of audio playback mode choose:



Equalizer settings interface

Note: In the Normal mode, users can customize effects model through the effect adjuster.

② In a field setting interface the user can freely adjust the bass and loudness of the contrast, the user can also on the front left, front right, left, right after the four angularly audio settings, as shown below:



Balance Setup Interface

Note: Adjust to the subw is only effective when it is linked to external 5.1 amp.

2.8.2 DVD Play

Insert the DVD disk the system will automatically enter the DVD interface and read the disk information automatically when a disk is detected and then start to play normally.



DVD Play Interface

Function details as below:

Icon	Button Name	Function Description
	Play/Pause	When playing, click it to pause. when pause, click it to continue playing.
	Next Track	Click to play the next track or next chapter.
	Last Track	Click to play the last track or next chapter.
	Fast forward	Click to fast forward increasingly as by 2X / 4X / 8X / 20X DVS: Click to fast forward increasingly as by 2X / 4X / 8X / 16X / 32X
	Fast Backward	Click to fast rewind increasingly as by 2X / 4X / 8X / 20X DVS: Click to fast rewind increasingly as by 2X / 4X / 8X / 16X / 32X
	Extended function	Used to eject the expansion function
	Title	Click to show title (need disk support)
	Cycle Play Mode	Click to set up playback mode, DVD: Chapter cycle / heading cycle / full catalog circulation / cycle cancellation; VCD: single cycle / all cycle / cycle cancellation.

	Random play mode	Options for ON and OFF, ON, switch on the next song, random play
	Channel Switch	Click to switch in different languages and audio tracks(need disk support).
	Subtitle	Click to switch subtitle display(need disk support)
	EQ Setup	Click to enter into EQ setup interface.
	Main Interface	Click to back to main interface.
	Back	Click to back to the last interface.

2.8.3 CD Player

Insert a CD disc, the system will automatically enter the CD interface, when a disc is detected, it will automatically read the disc information and start normal play.



CD Play Interface


Function details as below:

Icon	Name	Function
	Play/Pause	Click to play or pause.
	Next Track	At one time to play the next song, press down roll list for tracks
	Cycle Play Mode	Click to set up playback mode
	Random play mode	Click to set the random playback mode
	Last Track	Click to play the last track or next chapter.
	EQ Setup	Click to enter into EQ setup interface.
	Main Menu	Click to go back to main menu.
	Back	Click to go back to the last interface.

2.8.4 iPod Play

iPod Application> iPod

Click the iPod application icon to enter into the iPod play interface, just as shown below.

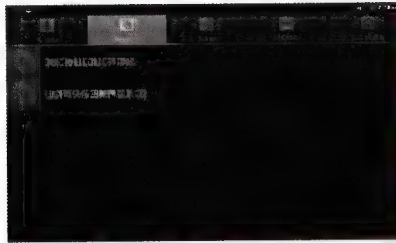

iPod Play Interface

Function details as below:

Icon	Name	Function
	Play/Pause	Click to play or pause.
	Next Track	Click to play the next track.
	Last Track	Click one time to replay the current track; Click twice to play the last track.
	Fast Forward	Press to fast forward.
	Fast Rewind	Press to fast rewind.
	Cycle Play Mode	Click to set up play modes: sequential play, single cycle, the whole catalog circulation.
	Random play mode	Click to start random play mode or cancel random play
	Artist	Click to play the iPod's song in the form of an artist.
	Album	Click to display the iPod's song in the form of album.
	Song	Click to display all the songs in the iPod.
	Play List	Click to display the listed songs in the iPod.


2.8.5 Audio Play

mp3/aac/flac/wav/wma/amr/m4a/ogg.

Audio player supports the following formats: mp3/aac/flac/wav/amr/m4a/ogg

Application>Music

Click music application icon to enter into the music player interface, as shown below:

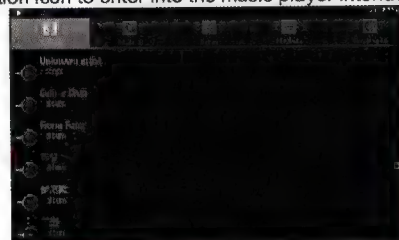

Artist Interface



Music Play Interface

Function details as below:

2.8.6 Video Playing


Icon	Button Name	Function Description
	Play / Pause	Click to play or pause.
	Next Track	play the next track.
	Last Track	play the last track.
	Cycle Play Mode	Click to set up play mode: sequential play, single cycle, the whole catalog circulation.
	Random Play	Click to start or cancel random play.
	Play List	Click to display the most recently added songs.
	Artist	Click to play all the song as if to be performed by an artist.
	Album	Click to display all the songs in the form of album.
	Songs	Click to display all the songs.
	Play List	Click to display the most recently added songs.

mp4/avi/wmv/3gp/flv/asf/mov/mkv/mpg. Supporting form of the video player:

mp4/avi/wmv/3gp/flv/asf/mov/mkv/mpg

Application >Video

Press to Video application icon to enter into video playing interface, take a photo for example.

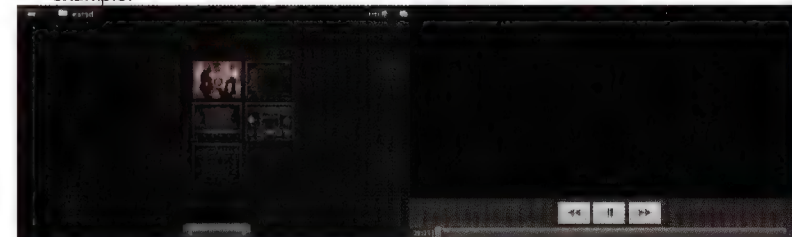

The detail of the button function of video playing interface


Icon	Button Name	Function Explanation
	Play/Pause	Press Pause when play

		Press Play when pause
▶▶	Forwards Fast	Click to forwards fast
◀◀	Backwards Fast	Click to backwards fast

2.8.7 Image View


Applications > photo Album.

Click the symbol under the application menu to enter into picture browse interface, the detail as below.

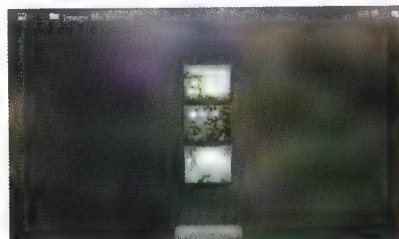

Picture Browse Interface

Click back into last content, you can move the picture at random or click to skimming picture right and left.
Click symbol shows personality, detail as below.

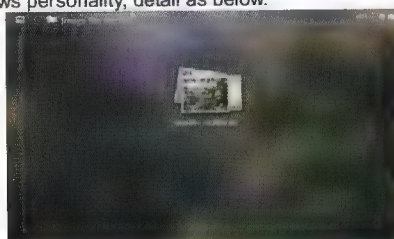


Picture Skimming Interface(Personality display)

Click to any picture enter into single picture skimming mode, detail as below.



to move the picture left and right by one's hand to view the photo, under the normal states to double-click the photo to change the photo's size. Click the symbol to enter into the skimming mode for all photos. Click symbols, it will do other function operation.

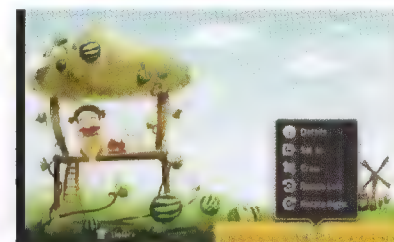

Single Picture Skimming Interface(Other Function Operation)

Function Explanation,

Icon	Bottom Name	Function Instruction
	Delete	To delete the selected picture.
	Detail Setting	to show title, type, shooting time, photo album and place on the picture.
	Setting	According to your choice to setup image screen
	Trim	According to your choice to trim it.
	Rotate Left	According to Auticlockwise to turn picture for 90
	Rotate Right	According to clockwise to turn picture for 90

2.8.8 Digital TV

Application > Digital TV

Click analog TV application icon into the digital TV interface

The function detail of digital TV interface explain as below.

Remark, the description of the digital TV, please refer to the digital TV instruction.

Icon	Button Name	Function Explanation
	Menu	Click to back into menu
	Back	Click to back into last content
	EQ	Click to enter into EQ interface

2.8.9 Analog TV

Application > Analog TV

Click Analog TV Icon to enter into Analog TV playing interface, details as below.

2.9 AUX IN Function

To ensure after video source under the normal state when it works.

Application > AUX IN

Press screen to come out a hide menu, click to enter into EQ setting interface, it can adjust EQ effects, click to back into last content, click to back into system menu.

2.10 Rear View

Auto start reverse gear, such as with a mirror, the system switches to the rear-view mirror screen output automatically, audio output sound still; if not equipped with rear-view mirror, the system remains the same player

2.11 E-mail

Users could use "Email" to send or receive email message.

Remark: Email messages could be sent and received based on the connection of Internet. Please contact your network service provider for the detailed setting parameters.


2.11.1 Email Setting

Application > E-mail


Enter a email address and password, then click next step to set account name, your name and signature, then click finish.

Users could also manually set the email account:


1. Enter email address and password;

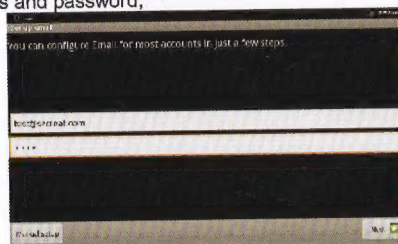


2. POP3、IMAP、Exchange); Click to manual setting, select the type of E-mail account.(For example: POP3、IMAP、Exchange)

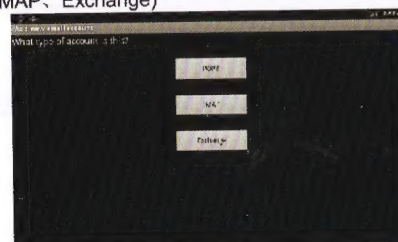


3. Set the receiving server, port, etc

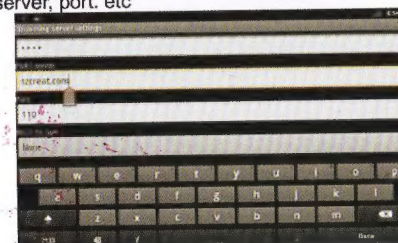


4. Set the outgoing server, port, etc.

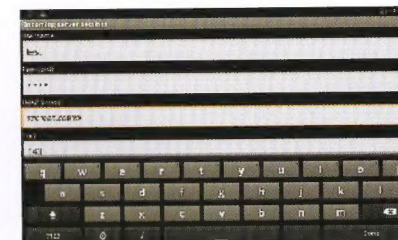

5. To build name for the new account

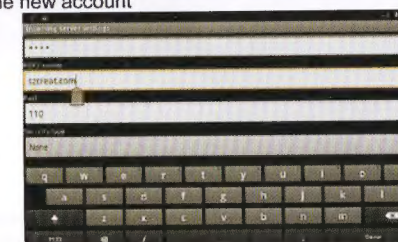


6. Enter into E-mail Interface

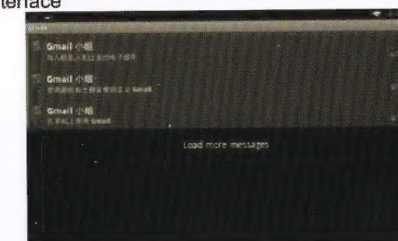


2.11.2 Sending E-mail


You can give one or more recipients to send mail. You can manually add the recipient and choose from your address book before sending E-mail.


Application > E-mail



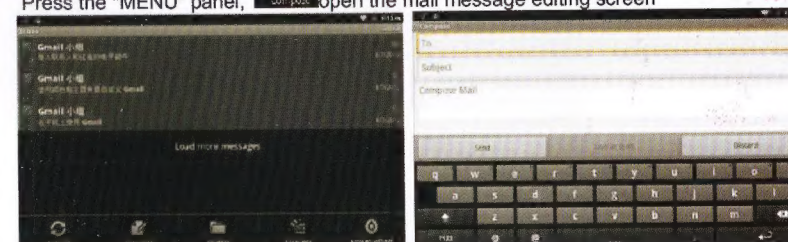Press the "MENU" panel,  open the mail message editing screen



1 It needs to input recipient, click recipient, put in recipient e-mail address.

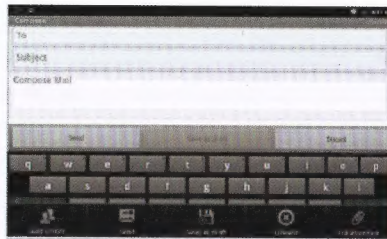

If necessary, press the panel "MENU" and select menu  menu function keys> Add Cc / Bcc, enter the Cc or Bcc recipient address.




- 2 Click the topic, enter a subject, click the letter input area, enter the desired content. According to the panel "MENU", the pop-up function keys, add an attachment , select the desired option, and insert the required documents
3. Click  to send E-mail


2.11.3 Receiving email

Application > E-mail

Press the  in "MENU" or use the mouse to slide to the end of inbox and click 

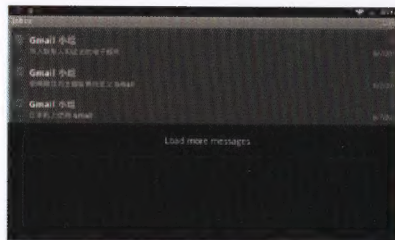

- 1 Instruments link the server and download the E-mails, and then save the received E-mails information in the inbox.
 - a. Choose the E-mail you needed so that you can read it.
 - b. Press "MENU" key when you are reading the E-mail and click "Forward" to transfer the E-mail to the other customers or click "reply" directly, edit the message and send the E-mail to the sender.



2.12 Message



You can send and receive short messages or MMS which contains multimedia documents.


2.12.1 Writing New Message

Application > information

Messaging Button

New message

Enter into the interface of composition, and follows as below.

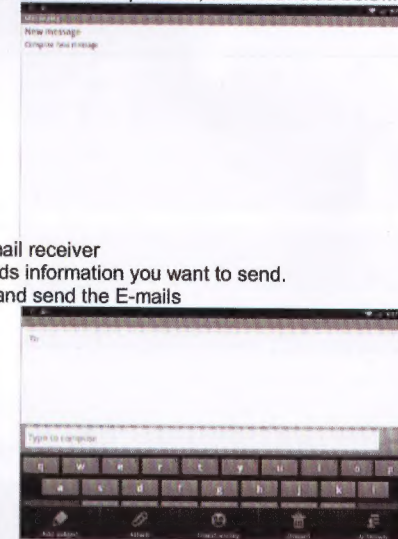

1. Input the E-mail receiver
2. Input the words information you want to send.
3. Click "send" and send the E-mails

2.12.2 Replying Message

When you receive new inbox, instructions column will display at the top of the computer and issue the prompts.

Application > information

After click "Corresponding information"

1. Click the "version input area"
2. Edit your replied information in the version input area and click "Reply-and-send" E-mail.

2.13 Applications

2.13.1 Weather


Application > Weather

Interface > long press interface


> Widgets



> Fancy widgets 4*2

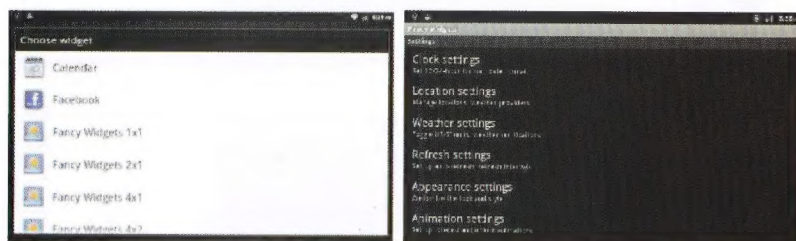

Enter the region selection, in the input box, enter the query you want to determine the area, click the icon to search as shown in the figure:

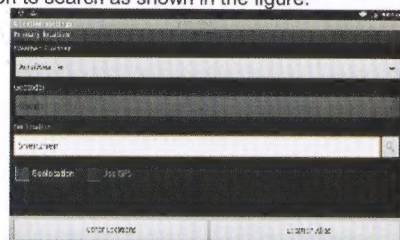


Search interface

2.13.2 Calculator

Application> Calculator



There two display Panel, basic and senior on the calculator, press MENU> senior or basic, or move from left to right, to chance freely in the two panel.

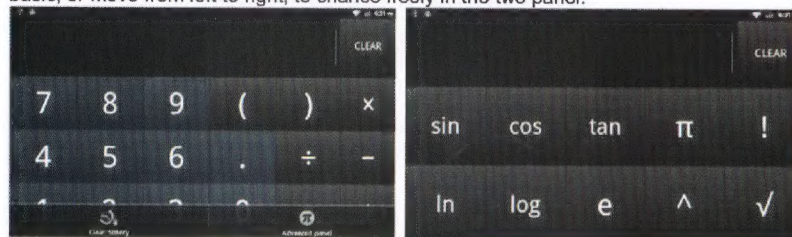

Remark, press MENU> delete the record



2.13.3 E- reader

According to the user's requirement to install the electronic reader, users can also install the third party reader software.

The system's user manual placed in the electronic reader, the user manual are available through the electronic reader!

3 Firmware Upgrading

3.1 preparing for upgrade

1. Firstly, format your SD card for what you use to firmware upgrade.


3.2. Upgrading Mcu

3.2.1

Copy Mcu firmware to the root directory of SD card, and Inserted into the machine SD card slot.


3.2.2

Start to update MCU(Settings->General->MCU update), click OK

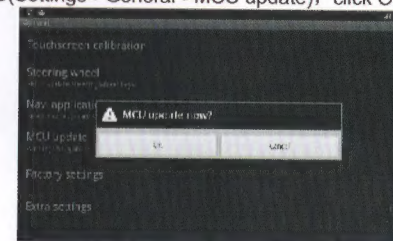

3.2.3

Wait for the upgrade is completed. The system will automatically restart after the upgrade is completed, please don't Ignition or shut down during the upgrade process.

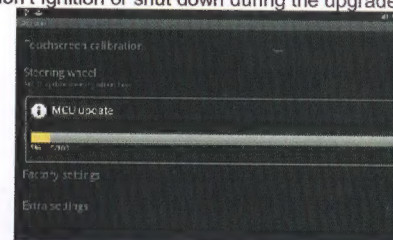

3.3 Update system


3.3.1. copy "u-boot-skip.bin, ulmage, uramdisk.img, system.img" to the root directory of SD card, and Inserted into the machine SD card slot.

3.3.2.

Shutdown

3.3.3.

Press and hold any panel buttons, and boot, the system will enter the upgrade interface automatically.

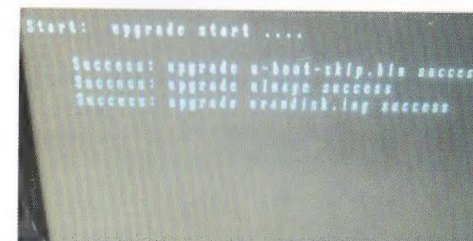

3.3.4

The system will automatically restart after update.(The system will enter the touch screen calibration interface after the restart, please complete it.)

3.3.5

If one or more errors occur, please ignore and repeat step 2 to step 4.

4.Update DVD

3.3.6 Burn "dvdrom.bin" to CD-ROM, and inserted into the machine dish mouth

3.3.7

Wait for the update is complete.

3.3.8

Eject the disc

4. Trouble handle

When your equipment met troubles, please check the problems as below.

Item	Problem	Solution
1	Can not connect to the network	① Check 3G Card is installed correctly ② SIM 卡 to make sure the correct and proper 3G terminal operator's SIM card ③ weather launched 3G card data ④ Mobile data roaming setting is connected or not. ⑤ APN weather selected ⑥ Whether 3G card arrears
2	It can't to save and mention "MCC" must 3 letter.	Check the 3G card install right or not.
3	Can't Install applications.	① Verify that the install application suffix is named "APK" ② Enter into Setting to select unknown sources
4	When the Bluetooth paired success, sometimes will be mentioned connect failed	A. Some cellphones with Android system may occur this problem at the first connection. Please just find the paired device in matching list and then connect them once more. B. The unsuccessful connection is compatibility issues between cell phone and Bluetooth. If this occurs, please check the options in pair list of your cell phone. And you will find that the setting of Bluetooth Media and Mobile Media has been turned off. Turn on them and the connection will be successful.
5	How to install applications	First, please copy the application files with suffix ".APK" to your SD or U disk. And the following are installation methods: 1. Click into the document management interface to find the SD card or U disk directory, and then select the ".APK" suffixed application file and click to install. 2. Find the Setting interface—>Applications—>install application, select the ".APK" suffixed application file and click to install.
6	How to uninstall users APK application	Interface Setting—>Applications—>Installation Applications—>Uninstall Application. To click the uninstallation APK Applications
7	Radio can't research channels	to check the radio antenna whether connected and have signal before use it.
8	No sound output	System is muted or not


Wiring Diagram

Frequency Range
AM 522-1620KHz
FM 87.5-108MHz
FM 65-74MHz

DC Power:12V
Ground Cable

Speaker Impedance:
4Ω

Attention:
Incorrect connection
may damage the unit!

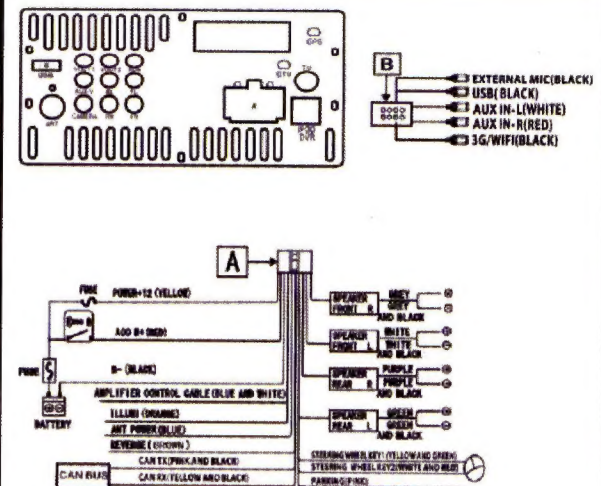

parking cable must be connected to B- or there is no video display